





by GT LINE

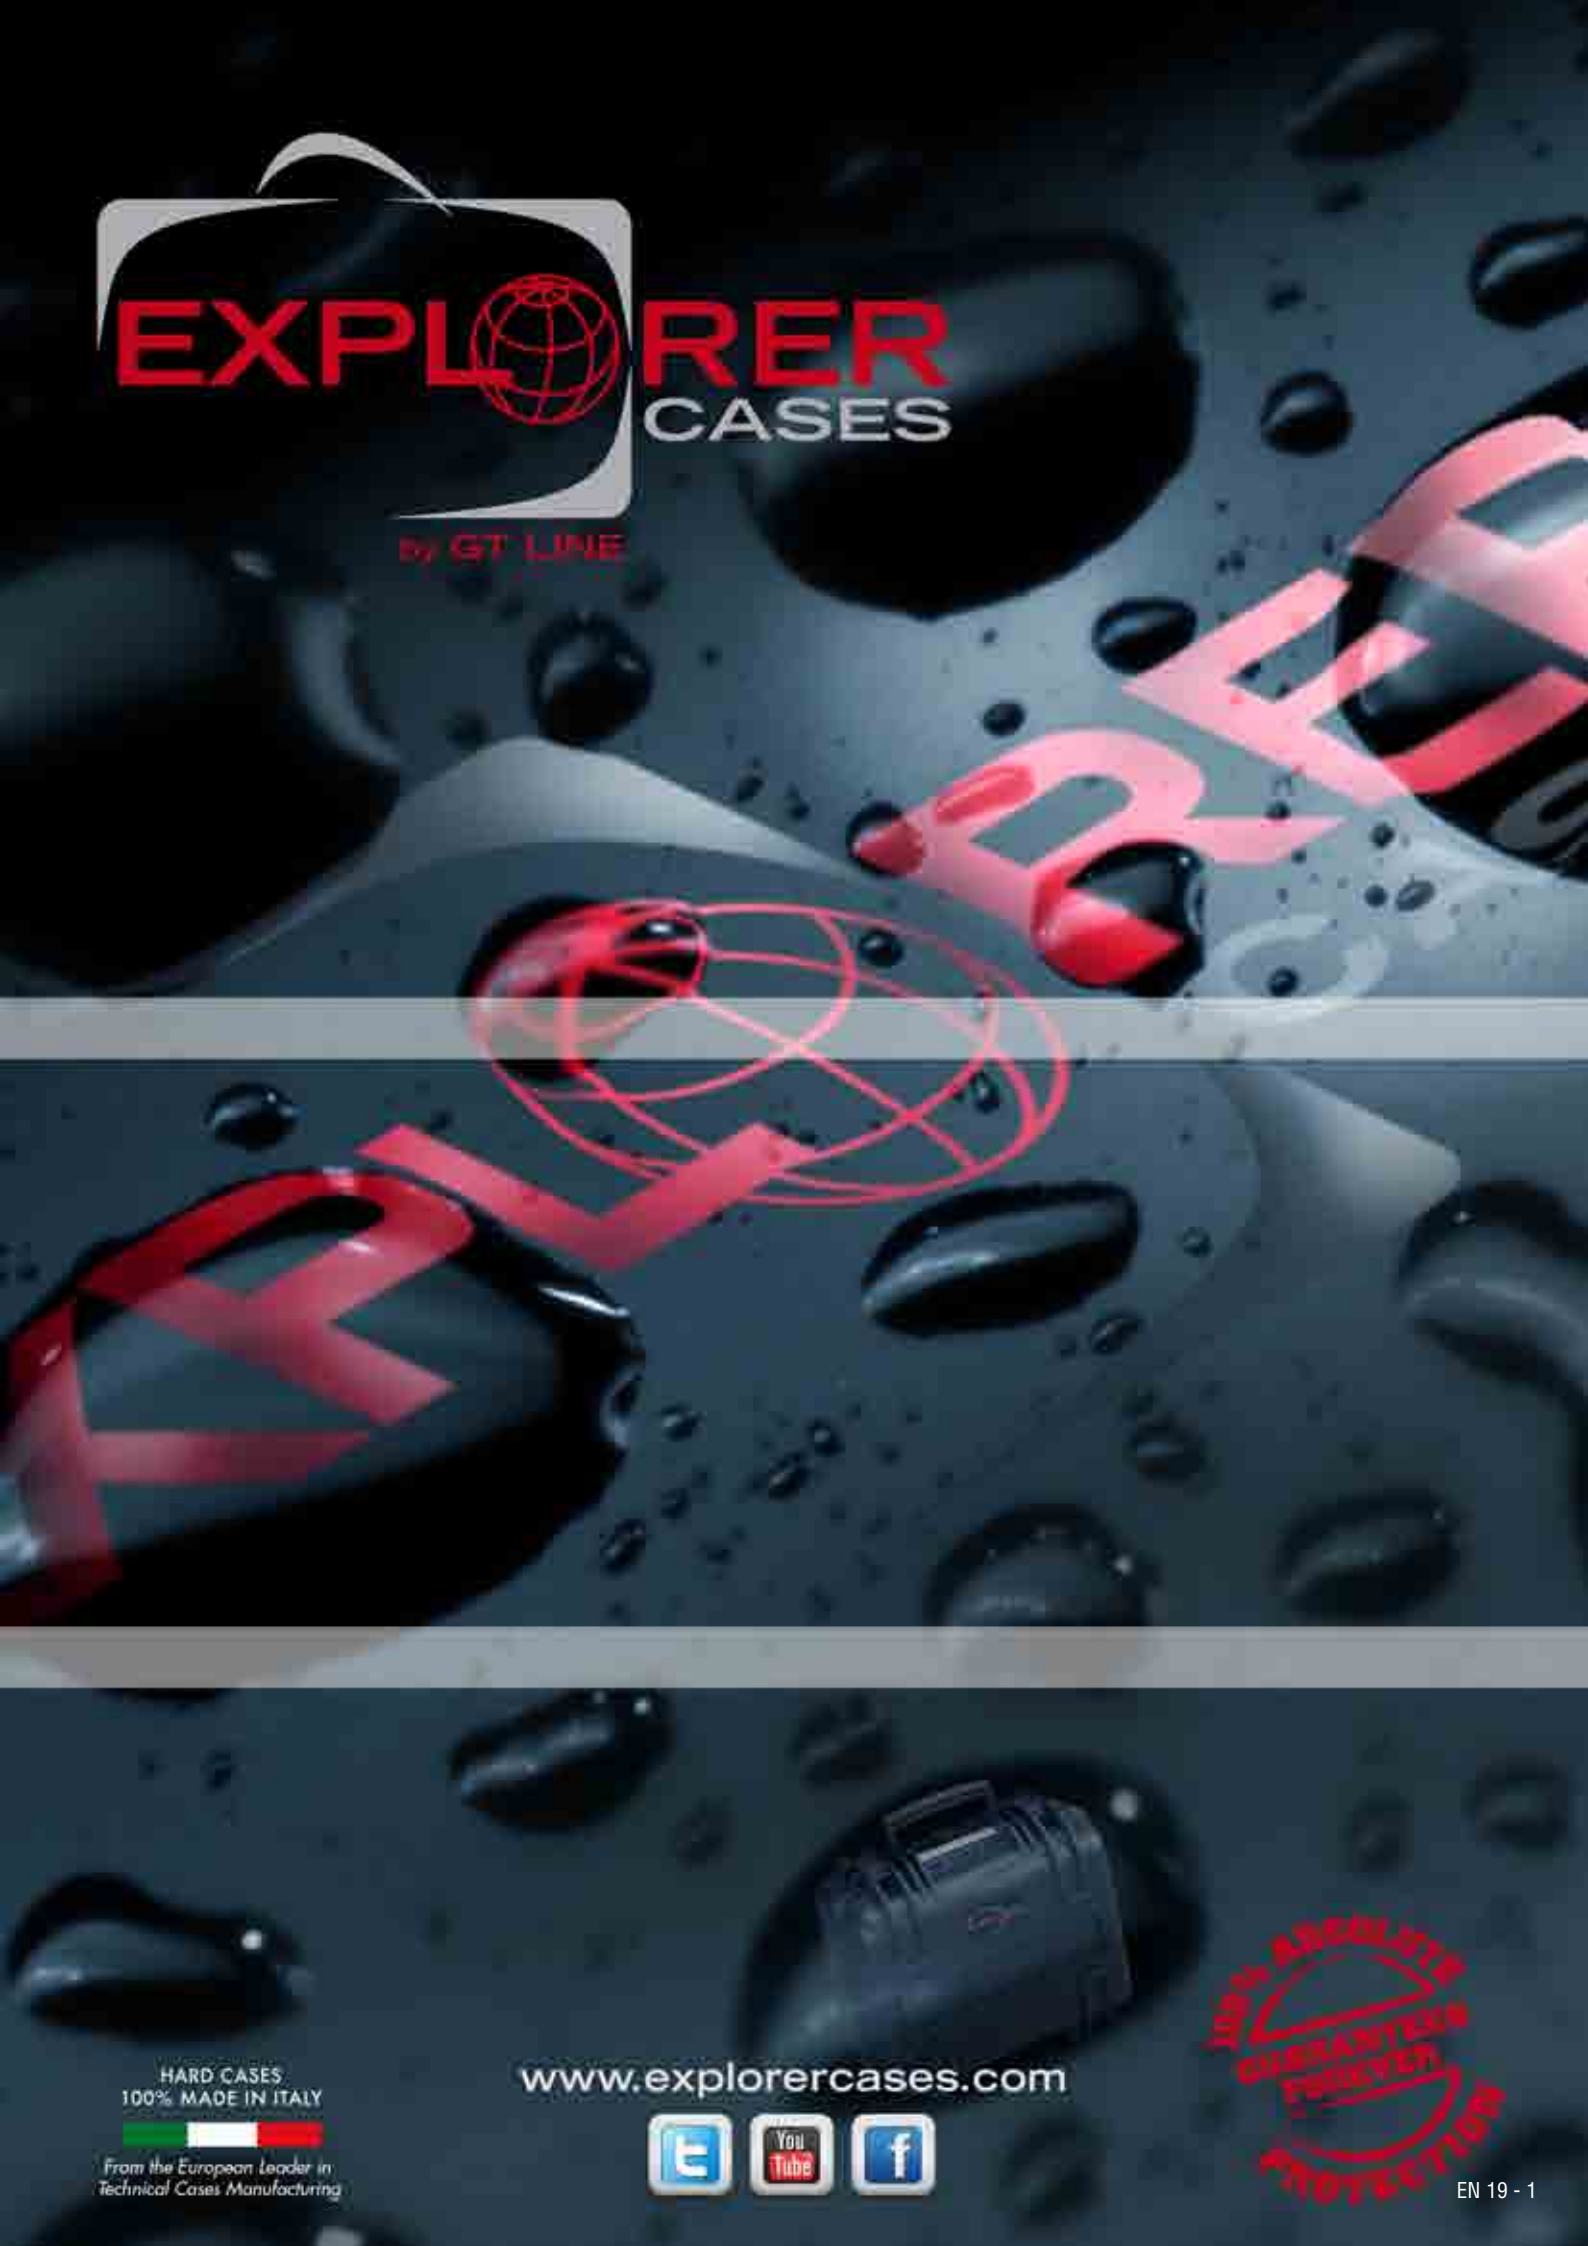

HARD CASES
100% MADE IN ITALY



From the European Leader in
Technical Cases Manufacturing

www.explorercases.com





100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION



WATERTIGHT

INTERSTACKABLE

HIGH THICKNESS
BODY MATERIAL

CORROSIONPROOF

TEMP RATING
-33°C/+90°C

SAND & DUST
PROOF

SHOCKPROOF

CRUSHPROOF

DESIGNED FOR
MILITARY USE

AIRTIGHT

STAINLESS TREATED
METAL PARTS

PADLOCKABLE

GUARANTEED
FOREVER

NEW

INTRODUCING:



The lightest cases in their size category

BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Numbers (NSN) available on demand.



FEATURES:

1. REINFORCED CORNERS
2. PU SINGLE BLOCK O-RING SEAL
3. LID CAN BE SET TO SLIDE-OFF (certain mod.)
4. CORROSION PROOF METAL PINS
5. PP BASED INJECTION MOLDED BODY
6. SELF OILING WHEELS (certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
10. PRECUBED FOAM LAYERS
11. CONVOLUTED FOAM IN THE LID
12. PADLOCKABLE IN SEVERAL POINTS
13. JAM-FREE LATCHES
14. POSITIVE STACKING LOCATION

STANDARD COLORS:




BLACK




MIL. GREEN



ORANGE



DES. SAND



*BY RELEASING THE SCREW LID BECOMES SET TO SLIDE OFF WHEN OPENED AT 70°





OUR SUPERIOR FEATURES

100% A
GU

- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations
- All available empty or with "pick & pluck" foam layers





1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	85	20	65
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16
External dim.	mm	216	180	102		
	in	8 1/2	7 1/16	4		
Weight empty	kg 0,70		lbs 1.54			
Weight w/foam	kg 0,80		lbs 1.76			
Volume	lt 2,0		gal 0.52			
Buoyancy	kg/max 1,4		lbs/max 3.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U



1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	135	20	115
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2
External dim.	mm	216	180	152		
	in	8 1/2	7 1/16	6		
Weight empty	kg 0,85		lbs 1.87			
Weight w/foam	kg 0,92		lbs 2.02			
Volume	lt 3,2		gal 0.79			
Buoyancy	kg/max 2,4		lbs/max 5.29			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty



- Optional shoulder strap available (Art. SHOULDERKIT.U)

**ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



2209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/16	4 7/16		
Weight empty	kg 0,88		lbs 1.94			
Weight w/foam	kg 0,99		lbs 2.18			
Volume	lt 3,3		gal 0.79			
Buoyancy	kg/max 2,3		lbs/max 5.07			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U

2214		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		
Weight empty	kg 1,16		lbs 2.56			
Weight w/foam	kg 1,29		lbs 2.84			
Volume	lt 5,1		gal 1.32			
Buoyancy	kg/max 3,9		lbs/max 8.59			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)



OUR FULL WARRANTY

"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments. That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on www.explorercases.com



2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	305	270	144		
	in	12	10 5/8	5 11/16		
Weight empty	kg 1,62		lbs 3.57			
Weight w/foam	kg 1,83		lbs 4.03			
Volume	lt 6,6		gal 1.58			
Buoyancy	kg/max 4,2		lbs/max 9.25			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-R and PANEXPL27
- Counterbalance supports

2712	BAG-R	DIV2712
PANEXPL27		



2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	305	270	194		
	in	12	10 5/8	7 5/8		
Weight empty	kg 1,93		lbs 4.25			
Weight w/foam	kg 2,12		lbs 4.67			
Volume	lt 9,3		gal 2.37			
Buoyancy	kg/max 6,7		lbs/max 14.77			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-S and PANEXPL27
- Counterbalance supports

2717	BAG-S	DIV2717
PANEXPL27		



3005		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	300	210	58	20	38
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2
External dim.	mm	326	269	75		
	in	12 13/16	10 9/16	2 15/16		
Weight empty		kg 1,10		lbs 2.42		
Weight w/foam		kg 1,20		lbs 2.64		
Volume		lt 4		gal 1.05		
Buoyancy		kg/max 2,10		lbs/max 4.62		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		

- Stainless steel reinforced padlockable points
- Can be stored in vertical position
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Reccessable handle keeps the case in flat horizontal position



Can be stored in vertical position



Art. SHOULDERKIT.U



Reccessable low profile handle



Stainless steel reinforced padlockable points




3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty		kg 2,29		lbs 5.04		
Weight w/foam		kg 2,51		lbs 5.53		
Volume		lt 13,1		gal 3.43		
Buoyancy		kg/max 7,0		lbs/max 15.43		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-T and PANEXPL33



Counterbalance supports

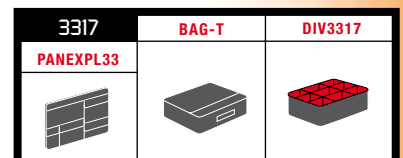






3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		
Weight empty	kg	2,92		lbs 6.43		
Weight w/foam	kg	3,30		lbs 7.27		
Volume	lt	19,6		gal 5.17		
Buoyancy	kg/max	10,6		lbs/max 23.36		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	BE				
	black w/foam	black empty				

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-U and PANEXPL33W



Counterbalance supports

3317W	BAG-U	DIV3317W
PANEXPL33W		
		






3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	45	135
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty	kg	3,14		lbs 6.92		
Weight w/foam	kg	3,58		lbs 7.89		
Volume	lt	18,4		gal 4.75		
Buoyancy	kg/max	12,4		lbs/max 27.33		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Can accommodate BAG-E and PANEXPL38



Counterbalance supports

3818	BAG-E	DIV3818
PANEXPL38		
		

**ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty	kg	3,40		lbs 7.49		
Weight w/foam	kg	3,90		lbs 8.59		
Volume	lt	19,2		gal 5.01		
Buoyancy	kg/max	10,7		lbs/max 23.58		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty
	BC	GC				
	black w/pc bag	mil. green w/pc bag				

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERSKIT.U)
- Soft grip rubber handle
- Counterbalance supports
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44
- Can accommodate one GBAG 44



4412.B C and 4412.G C >>>
include:
- computer bag with shoulder strap (art. BAG-PC44)
- organized lid panel (art. PANEXPL44)
- shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)

4412	BAG-PC44	DIV4412
PANEXPL44		



4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		
Weight empty	kg 4,00		lbs 8.81			
Weight w/foam	kg 4,70		lbs 10.36			
Volume	lt 29,2		gal 7.66			
Buoyancy	kg/max 19,7		lbs/max 43.43			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-A, DIV4419 and PANEXPL44



Art. SHOULDERKIT.U

4419	BAG-A	DIV4419
PANEXPL44		



4820		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	205	50	155
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8
External dim.	mm	520	435	230		
	in	20 1/2	17 1/8	9 1/16		
Weight empty	kg 4,64		lbs 10.22			
Weight w/foam	kg 5,40		lbs 11.90			
Volume	lt 35,5		gal 9.24			
Buoyancy	kg/max 24,7		lbs/max 54.45			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810G					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48



4820	BAG-F
PANEXPL48	
BAG-PC48	DIV4820

Art. BAG-PC48 - Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case.



5117		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	173	50	123
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16
External dim.	mm	546	347	197		
	in	21 1/2	13 11/16	7 3/4		
Weight empty	kg 3,80		lbs 8.37			
Weight w/foam	kg 4,50		lbs 9.92			
Volume	lt 24,7		gal 6.34			
Buoyancy	kg/max 15,8		lbs/max 34.83			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51



Art. SHOULDERKIT.U

5117-5122	BAG-B	DIV51
PANEXPL51		



Easy to open release telescopic handle

5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty	kg 6,00		lbs 13.22			
Weight w/foam	kg 7,00		lbs 15.43			
Volume	lt 31,0		gal 8.18			
Buoyancy	kg/max 21,5		lbs/max 47.39			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Soft grip rubber handle and telescopic handle
- Wheels with bearings
- Can accommodate BAG-B, DIV51 and PANEXPL51

5117-5122	BAG-B	DIV51
PANEXPL51		



* Complies with Ryanair, Vueling and other low-cost airlines' size restrictions.

5218		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	180	30	150
	in	20 1/2	11 1/4	7 1/16	1 3/16	5 7/8
External dim.	mm	550	350	200		
	in	21 5/8	13 3/4	7 7/8		
Weight empty	kg	3,75		lbs 8.26		
Weight w/foam	kg	4,30		lbs 9.47		
Volume	lit	26,6		gal 7.02		
Buoyancy	kg/max	20,0		lbs/max 44.09		
Temp. rating	°C	min -33	max +90		°F min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Mod.	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Optional shipping label holder (Art. KIN.1224)




New pull release latch grants additional safety, drop test proof

- Lid can be set to slide-off (see pg. 3 for details)
- New soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels



BACKPACK CABIN

(see pg. 33 for details)



**100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



Optional shipping label holder (Art. KIN.1224)



New pull release latch grants additional safety, drop test proof



* Complies with major airlines' size restrictions.

5221		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	205	55	150
	in	20 1/2	11 1/4	8 1/16	2 3/16	5 7/8
External dim.	mm	550	350	225		
	in	21 5/8	13 3/4	8 7/8		
Weight empty		kg 3,90		lbs 8.59		
Weight w/foam		kg 4,50		lbs 9.92		
Volume		lt 30,3		gal 8.00		
Buoyancy		kg/max 20,0		lbs/max 44.09		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Mod.	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Lid can be set to slide-off (see pg. 3 for details)
- New soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



5218-5221	DIV52
PANEXPL52	

Self-oiling free running wheels



GREAT VERSATILITY OF CONFIGURATIONS



Telescopic handle



Ability to stack



Removable top lid



Automatic pressure release valve



Folding side handles for two men lift



4 top lid latches



Padlockable points



4 robust self-oiling wheels



4 front door latches



Easy transportability



All drawers come out completely



Removable frontal lid



Front lid can be opened up to 180°

5140.BKT01.AH
Case with foam filled drawers



- O-rings on upper and frontal lids
- Detachable top lid
- Removable tray
- I.D. label
- 1x30H mm. drawer with bi-color pre-cubed foam
- 2x60H mm. drawers with bi-color pre-cubed foam
- 1x95H mm. drawer with bi-color pre-cubed foam
- Detachable frontal lid
- Label for content identification of the drawers



Improved stop-in-open position drawers system

5140.BKT02.AH
Case with empty drawers



- O-rings on upper and frontal lids
- Detachable top lid
- Removable tray
- I.D. label
- 1x30H mm. drawer empty
- 2x60H mm. drawers empty
- 1x95H mm. drawer empty
- Detachable frontal lid
- Label for content identification of the drawers



Improved stop-in-open position drawers system



USE IT WITH IDRAW - DRAWERS

5140.BKTE.AH

Case drawers ready

Side rails, can fit a maximum of 8 IDRAW (see the combination table below)



AIDRAW3.E



AIDRAW3.F



AIDRAW6.E



AIDRAW6.F




AIDRAW9.E



AIDRAW9.F


IDRAW - 10 POSSIBLE CONFIGURATIONS - more info on www.explorercases.com




8 x H30 mm



6 x H30 + 1 x H60 mm



4 x H30 + 2 x H60 mm




2 x H30 + 3 x H60 mm



4 x H60 mm



5 x H30 + 1 x H95 mm




2 x H30 + 2 x H95 mm



1 x H60 + 2 x H95 mm



1x H30+2x H60+1x H95mm



3x H30+1x H60+1x H95mm

Art. AIDRAW

Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm, designed to contain all kinds of components and accessories. They can be easily inserted into the 5140. Available completely empty (.E) or with a bicolor pre-cubed foam (.F). See table on the next page.

USE IT WITH IBOX - BOXES

5140X.B Case boxes ready

NEW Side rails, can fit a maximum of 7 IBOX (see the combination table below)



Art. AIBOX
Available in 3 different heights and 2 internal configurations. See table below.



Art. AIPANEL PLEXI
Transparent lid cover. Useful for foam inserts or readable instructions.




AIWHEELS

4 optional pivoting wheels, 2 equipped with brakes, allow 5140 through narrow spaces.

AIDRAW and AIBOX				
DESCR.	ART.	INT. CONFIG.	INT. DIM. (mm)	Q.TY
DRAWER	AIDRAW3.E	EMPTY	467x255xH30	1 pc
DRAWER	AIDRAW3.F	WITH FOAM	467x255xH30	1 pc
DRAWER	AIDRAW6.E	EMPTY	467x255xH60	1 pc
DRAWER	AIDRAW6.F	WITH FOAM	467x255xH60	1 pc
DRAWER	AIDRAW9.E	EMPTY	467x255xH95	1 pc
DRAWER	AIDRAW9.F	WITH FOAM	467x255xH95	1 pc
BOX	AIBOX3.E	EMPTY	467x255xH30	1 pc
BOX	AIBOX3.F	WITH FOAM	467x255xH30	1 pc
BOX	AIBOX6.E	EMPTY	467x255xH60	1 pc
BOX	AIBOX6.F	WITH FOAM	467x255xH60	1 pc
BOX	AIBOX9.E	EMPTY	467x255xH95	1 pc
BOX	AIBOX9.F	WITH FOAM	467x255xH95	1 pc

5140		L	W	D		
External dim.		LENGTH	WIDTH	DEPTH	LID	BASE
		mm	581	381	455	
		in	22 7/8	15	17 15/16	
VERSIONS	BKT01.AH	black - w/foam filled drawers	Weight	kg 13,80	lbs 30.42	
	BKT02.AH	black - w/empty drawers	Weight	kg 13,00	lbs 28.66	
	BKTE.AH	black - AIDRAW ready	Weight	kg 9,75	lbs 21.49	
	X.B	black - AIBOX ready	Weight	kg 9,75	lbs 21.49	
	BE.AH	black - completely empty	Weight	kg 7,52	lbs 16.57	
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

IBOX - 8 POSSIBLE CONFIGURATIONS - more info on www.explorercases.com

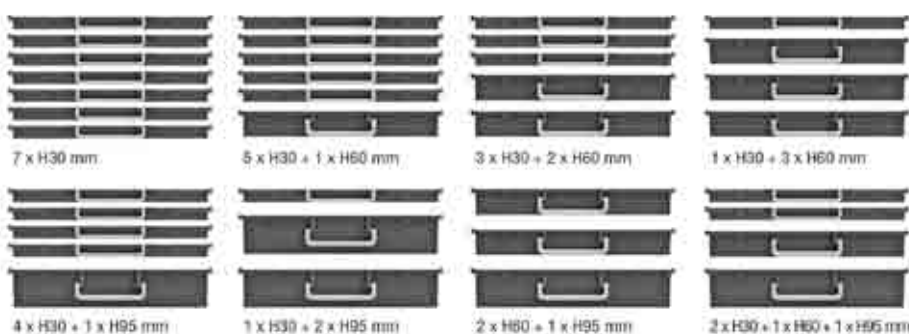

Art. AIBOX

The Aidraw with a translucent lid becomes a practical organizer.

The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools.

Available completely empty (.E) or with a bicolor pre-cubed foam (.F).

They can be stacked positively and can stand in vertical position.



CERTIFICATIONS

There are lots of different kinds of waterproof cases available on the market, but only Explorer Cases can guarantee superior features of excellence. As a matter of fact, they feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on www.explorercases.com



5325		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		
Weight empty	kg 7		lbs 15.43			
Weight w/foam	kg 8,25		lbs 18.18			
Volume	lt 53		gal 14.00			
Buoyancy	kg/max 37,2		lbs/max 82.01			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Two men lift side handles



Stainless steel reinforced padlockable points

5325-5326	2x BAG-V
PANEXPL53	
2x DIV53	1x BAG-V + 1x DIV53

**100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



5326		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		
Weight empty	kg	10		lbs 22.04		
Weight w/foam	kg	11,25		lbs 24.80		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Two men lift side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53




Stainless steel reinforced padlockable points

5325-5326	2x BAG-V
PANEXPL53	
	1x BAG-V + 1x DIV53



5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty	kg 7,16		lbs 15.78			
Weight w/foam	kg 8,39		lbs 18.49			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58




5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty	kg 9,17		lbs 20.21			
Weight w/foam	kg 10,40		lbs 22.92			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58



Self-oiling free running wheels



100% ABSOLUTE
 GUARANTEED
 FOREVER
 PROTECT YOUR



5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty	kg 10,54		lbs 23.23			
Weight w/foam	kg 12,65		lbs 27.88			
Volume	lt 84,2		gal 22.19			
Buoyancy	kg/max 62,0		lbs/max 136.68			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+1xDIV58+1xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2 and PANEXPL58
- Can accommodate up to 5 GBAG 58


5833		1x DIV58.1 + 1x DIV58 + 1x DIV58.2	
PANEXPL58			
2x DIV58 + 2x DIV58.2		2x DIV58.1	
1x BAG-G + 1x DIV58.2 + 1x DIV58.1		2x BAG-G + 2x DIV58.2	



Two men lift side handles

7630		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	305	60	245
	in	30 1/8	19 1/8	12	2 3/8	9 5/8
External dim.	mm	860	560	355		
	in	33 7/8	22 1/16	14		
Weight empty	kg	13,56		lbs	29.89	
Weight w/foam	kg	16,39		lbs	36.13	
Volume	lt	113,1		gal	29.85	
Buoyancy	kg/max	81,8		lbs/max	180.33	
Temp. rating	°C	min -33 max +90		°F	min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F - ATA 300					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles and large front handle
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xBAG-M, 2xDIV7630 o 2xBAG-L+1xDIV7630 e PANEXPL76
- Can accommodate up to 6 GBAG 76

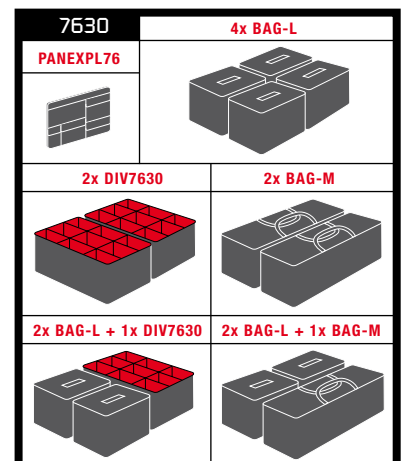

THE RANGE



The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam converters and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement.

In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		
Weight empty	kg 15,02		lbs 33.11			
Weight w/foam	kg 18,87		lbs 41.60			
Volume	lt 153,9		gal 40.41			
Buoyancy	kg/max 118,5		lbs/max 261.24			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty


- Side handles
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Two men lift side handles
- Can accommodate 4xBAG-O, 2xBAG-P, 2xBAG-O+1xBAG-P, 2xDIV7641, 2xBAG-O+1xDIV7641 e PANEXPL76
- Can accommodate up to 8 GBAG 76

7641	4x BAG-O
PANEXPL76	
2x DIV7641	2x BAG-P
2x BAG-O + 1x DIV7641	2x BAG-O + 1x BAG-P




7726		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	265	90	175
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8
External dim.	mm	836	641	304		
	in	32 15/16	25 1/4	11 15/16		
Weight empty	kg	10,30		lbs 22.70		
Weight w/foam	kg	12,60		lbs 27.77		
Volume	lit	118		gal 31.17		
Buoyancy	kg/max	70		lbs/max 154.32		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty


- Large front handle
- Side handles
- Self-oiling free running wheels
- Can accommodate 2xDIV77 and PANEXPL77

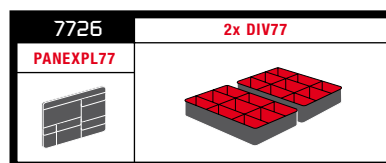


COMMON FEATURES



Shipping label holder




Automatic purge valve



Stainless steel reinforced padlockable points

7745		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	450	90	360
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16
External dim.	mm	836	641	489		
	in	32 15/16	25 1/4	14 3/16		
Weight empty	kg	15,50		lbs 34.17		
Weight w/foam	kg	19,80		lbs 43.65		
Volume	lit	200		gal 52.83		
Buoyancy	kg/max	144		lbs/max 317.47		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Large front handle
- Retractable handle
- Side handles
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

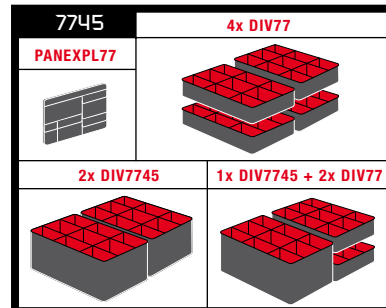

100% ABSOLUTE
 GUARANTEED
 FOREVER
 PROTECTION



COMING
 SOON



7814		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	780	350	145	42	103	
	in	30 11/16	13 3/4	5 11/16	1 5/8	4 1/16	
External dim.	mm	846	427	167			
	in	33 5/16	16 13/16	6 9/16			
Weight empty		kg 5,50		lbs 12.12			
Weight w/foam		kg 6,40		lbs 14.11			
Volume		lt 39,6		gal 10.46			
Buoyancy		kg/max 25,3		lbs/max 55.77			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions		B	G	D	BE	GE	DE
		black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handle and front rubber grip handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



One side handle



New pull release latch grants additional safety, drop test proof



9413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty	kg 6,70		lbs 14.77			
Weight w/foam	kg 7,70		lbs 16.97			
Volume	lt 45,3		gal 11.96			
Buoyancy	kg/max 27,9		lbs/max 61.50			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Wheels with bearings
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 94 or 2 HBAG 94



3-digits locks on demand (case code + DL)



11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		
Weight empty	kg 7,80		lbs 17.19			
Weight w/foam	kg 8,80		lbs 19.40			
Volume	lt 53,7		gal 14.18			
Buoyancy	kg/max 33,3		lbs/max 73.41			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 114 or 2 HBAG 114



3-digits locks on demand (case code + DL)





13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1430	415	159		
	in	56 5/16	16 5/16	6 1/4		
Weight empty	kg 8,70		lbs 19.18			
Weight w/foam	kg 9,95		lbs 21.93			
Volume	lt 63,7		gal 16.82			
Buoyancy	kg/max 39,5		lbs/max 87.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

3-digits locks on demand (case code + DL)



- Two men lift side handles and large front handle
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 135 o 2 HBAG 135



13527		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty	kg 11,70		lbs 25.79			
Weight w/foam	kg 14,90		lbs 32.84			
Volume	lt 128,5		gal 33.94			
Buoyancy	kg/max 97,5		lbs/max 214.95			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Two men lift side handles



6 wheels with bearings



3-digits locks on demand (case code + DL)

- Two men lift side handles and large front handle
- Wheels with bearings
- Can accommodate 2 GBAG 135



THE LONGEST WATERPROOF CASE ON THE MARKET




Self-oiling free running wheels



Two men lift side handles



Double automatic purge valves



New wide pull release latch grants additional safety drop test proof

15416		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1540	377	160	42	118
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8
External dim.	mm	1629	456	183		
	in	64 1/8	17 15/16	7 3/16		
Weight empty		kg 11,30		lbs 24.91		
Weight w/foam		kg 13,40		lbs 29.54		
Volume		lt 92,9		gal 24.54		
Buoyancy		kg/max 61,6		lbs/max 135.80		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles and large front handle
- Self-oiling free running wheels
- Stainless steel reinforced padlockable points
- Double automatic purge valves

**100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



Two men lift side handles



Optional 3-digits locks (case code + DL)

VERSIONS

10826.B
black - with plastic latches, hinged lid and metal support stays, internal precubed foam layers, convoluted foam in the lid.

10826.BE
black - with plastic latches, hinged lid and metal support stays, empty.



Stainless steel reinforced padlockable points and metal latches



4 self-oiling free running wheels



10826		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		
Weight empty	kg	17		lbs 37.47		
Weight w/foam	kg	20,40		lbs 44.97		
Weight w/multi weapons foam	kg	19,60		lbs 43.21		
Volume	lt	174		gal 45.96		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

- Mod. 10826.BE can accommodate up to 4 GBAG 108



100%
G



12 HEAVY DUTY METAL LATCHES grant a more reliable retaining during rough handling.



4 self-oiling free running wheels



4 Stainless steel reinforced padlockable points



VERSIONS

- 10840.B**
black - with foam
- 10840.G**
mil. green - with foam
- 10840.BE**
black - empty
- 10840.GE**
mil. green - empty



Art. PANDIV.10840
Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware

		10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	1080	620	400	200	200		
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8		
External dim.	mm	1178	718	427				
	in	46 3/8	28 1/4	16 13/16				
Weight empty		kg 19,80		lbs 43.65				
Weight w/foam		kg 26,30		lbs 57.32				
Weight w/multi weapons foam		kg 25,00		lbs 55.11				
Volume		lt 260		gal 68.68				
Buoyancy		kg/max 120,6		lbs/max 265.87				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				

- Can accommodate up to 6 GBAG 108
- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles



A CASE YOU CAN WEAR

The Explorer Cases backpacks, are the most innovative backpack carrying system for waterproof case available in the market: a simple concept, lightweight and cost effective solution to quickly turn a case into a backpack. This clever and user-friendly carrying system allows the owner to protect sensitive instruments and equipment stored in an explorer case and, at the same time, to get all the convenience of a free hands backpack solution. Available in two different sizes.

BACKPACK M FITS MODELS 3317, 3818 AND 5117 - **BACKPACK L** FITS MODELS 3317W, 4412, 4419 AND 4820



PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)
Ext. Dim. 185x120x65 mm.
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)
Ext. Dim. 185x120x115 mm.
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)
Ext. Dim. 215x155x75 mm.
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)
Ext. Dim. 215x155x125 mm.
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717)
Ext. Dim. 270x195x125 mm.
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317)
Ext. Dim. 325x230x100 mm.
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)
Ext. Dim. 325x340x100 mm.
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412)
Ext. Dim. 440x330x80 mm.
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419)
Ext. Dim. 440x330x135 mm.
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820)
Ext. Dim. 475x365x145 mm.
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)
Ext. Dim. 510x265x120 mm.
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218-5221)
Ext. Dim. 515x275x120 mm.
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)
Ext. Dim. 520x395x100 mm.
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)
Ext. Dim. 430x275x155 mm.
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)
Ext. Dim. 430x275x265 mm.
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)
Ext. Dim. 430x275x110 mm.
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)
Ext. Dim. 470x375x240 mm.
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)
Ext. Dim. 470x375x345 mm.
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)
Ext. Dim. 570x375x175 mm.
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)
Ext. Dim. 580x370x345 mm.
22 13/16 x 14 9/16 x 13 9/16 in.

COVERS FOR PHOTO DIVIDERS

Top covers are available for larger models (on demand).



COV44 (fits mod. 4412-4419)
COV48-76 (fits mod. 4820-7630-7641)
COV51 (fits mod. 5117-5122)
COV53 (fits mod. 5325-5326)
COV58 (fits mod. 5822-5823-5833)
COV77 (fits mod. 7726-7745)





DRONE DIVIDER

DIVIDER FOR LARGER DRONES - Internal adjustable partitions.

DRN77 (fits mod. 7745)
Ext. Dim. 740x570x350 mm.
29 1/8 x 22 7/16 x 13 3/4 in.

PHOTO AND DRONE BACKPACKS



DRN44 (fits mod. 4419)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



DRN53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

+



=



<< DRONE
BACKPACKS
Internal removable
pouches for
accessories



BPH44 (fits mod. 4419)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



BPH53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

>



<< PHOTO
BACKPACKS
Internal
adjustable
dividers



BACKPACK CABIN

This practical kit adds backpack transportability to the models 5218 and 5221.

- Generously and ergonomically padded for maximum comfort
- Detachable lap belt
- Quickly attachable and removable



>>>



>>>





100% ABSOLUTE
 GUARANTEED
 FOREVER
 PROTECTION

LID PANELS



PANEXPL27 (fits mod. 2712-17)
 Dim. 255x180 mm.
 10 1/16 x 7 1/16 in.



PANEXPL33 (fits mod. 3317)
 Dim. 310x215 mm.
 12 3/16 x 8 7/16 in.



PANEXPL33W (fits mod. 3317W)
 Dim. 310x320 mm.
 12 3/16 x 12 5/8 in.



PANEXPL38 (fits mod. 3818)
 Dim. 375x225 mm.
 14 3/4 x 8 7/8 in.



PANEXPL44 (fits mod. 4412-19)
 Dim. 422x295 mm.
 16 5/8 x 11 5/8 in.



PANEXPL48 (fits mod. 4820)
 Dim. 475x325 mm.
 18 11/16 x 12 13/16 in.



PANEXPL51 (fits mod. 5117-22)
 Dim. 500x230 mm.
 19 7/8 x 9 1/16 in.



PANEXPL52 (fits mod. 5218-21)
 Dim. 505x270 mm.
 19 7/8 x 10 5/8 in.



PANEXPL53 (fits mod. 5325-5326)
 Dim. 525x390 mm.
 20 11/16 x 15 3/8 in.



PANEXPL58 (fits mod. 5822-23-33)
 Dim. 575x395 mm.
 22 5/8 x 15 9/16 in.



PANEXPL76 (fits mod. 7630-7641)
 Dim. 755x440 mm.
 29 3/4 x 17 5/16 in.



PANEXPL77 (fits mod. 7726-7745)
 Dim. 720x530 mm.
 28 3/8 x 20 7/8 in.



PADDED BAGS



BAG-R (fits mod. 2712)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.

BAG-S (fits mod. 2717)
Ext. Dim. 270x195x130 mm.
10 5/8 x 7 11/16 x 5 1/8 in.

BAG-T (fits mod. 3317)
Ext. Dim. 325x230x95 mm.
12 13/16 x 9 1/16 x 3 3/4 in.

BAG-U (fits mod. 3317W)
Ext. Dim. 325x340x95 mm.
12 13/16 x 13 3/8 x 3 3/4 in.



BAG-E (fits mod. 3818)
Ext. Dim. 375x265x140 mm.
14 3/4 x 10 7/16 x 5 1/2 in.



BAG-PC44 (fits mod. 4412)
Ext. Dim. 450x345x55 mm.
17 11/16 x 13 9/16 x 2 3/16 in.



BAG-A (fits mod. 4419)
Ext. Dim. 450x350x125 mm.
17 11/16 x 13 3/4 x 4 15/16 in.



BAG-F (fits mod. 4820)
Ext. Dim. 475x365x160 mm.
18 11/16 x 14 3/8 x 6 5/16 in.



BAG-PC48 (fits mod. 4820)
Ext. Dim. 475x365x170 mm.
18 11/16 x 14 3/8 x 6 11/16 in.



BAG-B (fits mod. 5117-5122)
Ext. Dim. 530x285x135 mm.
20 7/8 x 11 1/4 x 5 5/16 in.



BAG-V (fits mod. 5325-5326)
Ext. Dim. 535x410x100 mm.
21 1/16 x 16 1/8 x 3 15/16 in.



BAG-G (fits mod. 5822-5823-5833)
Ext. Dim. 435x285x165 mm.
17 1/8 x 11 1/4 x 6 1/2 in.



BAG-L (fits mod. 7630)
Ext. Dim. 380x240x240 mm.
14 15/16 x 9 7/16 x 9 7/16 in.



BAG-M (fits mod. 7630)
Ext. Dim. 755x240x245 mm.
29 3/4 x 9 7/16 x 9 5/8 in.



BAG-O (fits mod. 7641)
Ext. Dim. 382x242x355 mm.
15 1/16 x 9 1/2 x 14 in.



BAG-P (fits mod. 7641)
Ext. Dim. 755x240x350 mm.
29 3/4 x 9 7/16 x 13 3/4 in.

PRECUBED FOAM

Standard models are available empty or with layers of precubed foam in the bottom and convoluted foam in the lid (custom foams available on demand).



SET OF CONVOLUTED FOAM
ONLY FOR THE LID - includes 2
pcs. (Art. LIDFOAM. + item nr.)



SET OF LAYERS OF PRECUBED
FOAM FOR THE BOTTOM AND
CONVOLUTED FOAM FOR THE
LID (Art. FOAM. + item nr.)





TRIPOD BAG

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



TRIPOD BAG90

Ext. Dim. 900x170max/140minx100 mm.
35 7/16 x 6 11/16max/ x 5 1/2 x 3 5/16 in.



NOTEBOOK SLEEVE

Protective padded notebook sleeve. Protects the laptop from shocks and scratches.

Realized in two dimensions, for PC 13"-13.3" and PC 15"-15.6"



TOP ENVELOPE 13

Protective sleeve for PC 13"-13.3"



TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"




MOUNTING BRACKETS


Our flexible manufacturing process allows us to easily and efficiently make your OEM case developing specific interiors to meet your requirements.




Art. KIT SUPP.PLAST (6 pcs.)



Art. KIT SUPP.EXPL (6 pcs.)

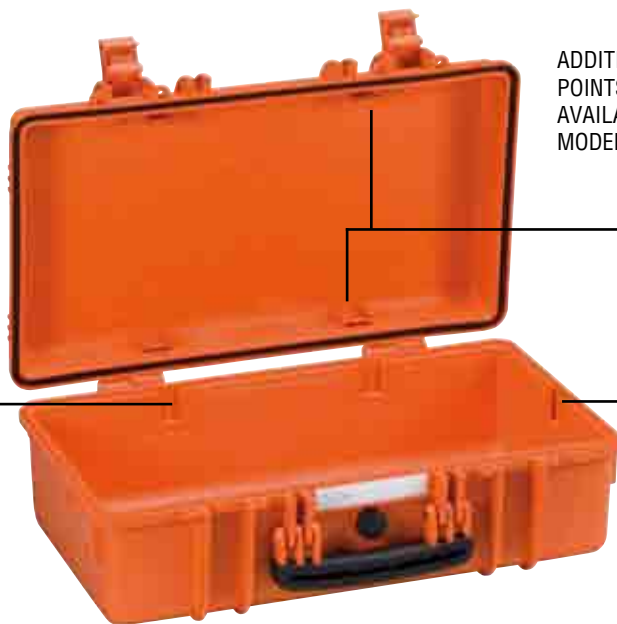

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS



Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA.

PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES MOULD SO AS NOT TO SWING OUT.



PATENTED HEAVY DUTY BRASS PADLOCK
(Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK
(Art. EXPL COMBILOCK)



TSA LOCK™ COMBI PADLOCK
(Art. EXPL TSA.DIGILOCK)



TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.



OEM SOLUTIONS

Our aim is always to grant maximum protection to the content, optimizing inner spaces and never ignoring handiness. Along with the standard production, should you have specific enquiries for cut foams, different case colors, labeling and other customizations, do not hesitate to get in touch with us for technical feedback.





- Empty
- Trolley case integral wheels and hinge out pull handle (only MUB78)

- Moulded High Impact Polypropylene
- Moulded integral lifting points on both ends
- Full length steel hinge pin to lid
- Positive grab over latching catches
- Lightweight
- Use in high/low temp environments
- Slide out clear ID Nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points

MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty	kg 6,30			lbs 13.88		
Volume	lt 89			gal 23.51		
Buoyancy	kg/max 80,5			lbs/max 177.47		
Versions	MUB78	MUB78.G E	MUB78.D E			
	black empty	mil. green empty	des. sand empty			

Art. KIT TRAY MUB - Optional - Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elasticated bands for the tray also available (KIT03).



- Empty

MUB65		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		
Weight empty	kg 4,40			lbs 9.70		
Volume	lt 61,5			gal 16.24		
Buoyancy	kg/max 42,7			lbs/max 94.13		
Versions	MUB65	MUB65.G E	MUB65.D E			
	black empty	mil. green empty	des. sand empty			



GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty	kg 7,1			lbs 15.65		
Weight w/foam	kg 8,1			lbs 17.85		
Volume	lt 46,6			gal 12.31		
Versions	GUNCASE.B	GUNCASE.BE	GUNCASE.B CV			
	black conv. foam in the lid flat foam in the bottom	black empty	black convoluted foam in the bottom and the lid			

- 4 easy action quick release "up&over" catches (2 with combi locks)
- Manual pressure release valve



Free running wheels




Strong metal handle

TECHNICAL SPECIFICATIONS

CODES	COLORS				INTERNAL CONFIG.	REMOV. LID	WHEELS	WEIGHT KG	BUOYANCY KG MAX	VOLUME LITRES	INTERNAL DIM. (mm)			EXTERNAL DIM. (mm)				
	BLACK	ORANGE	M. GREEN	D. SAND							L	W	D	LID	BASE	L	W	D
1908	BE	OE	GE		EMPTY			0,7	1,4	2	190	125	85	20	65	216	180	102
	B	O	G		W/FOAM			0,8										
1913	BE	OE	GE		EMPTY			0,85	2,4	3,2	190	125	135	20	115	216	180	152
	B	O	G		W/FOAM			0,92										
2209	BE	OE	GE		EMPTY			0,88	2,3	3,3	220	160	95	20	75	246	215	112
	B	O	G		W/FOAM			0,99										
2214	BE	OE	GE		EMPTY			1,16	3,9	5,1	220	160	145	20	125	246	215	162
	B	O	G		W/FOAM			1,29										
2712	BE	OE	GE		EMPTY			1,62	4,2	6,6	276	200	120	35	85	305	270	144
	B	O	G		W/FOAM	YES		1,83										
2717	BE	OE	GE		EMPTY			1,93	6,7	9,3	276	200	170	35	135	305	270	194
	B	O	G		W/FOAM	YES		2,12										
3005	BE	OE	GE	DE	EMPTY			1,1	2,1	4	300	210	58	20	38	326	269	75
	B	O	G	D	W/FOAM			1,2										
3317	BE	OE	GE		EMPTY			2,29	7	13,1	330	234	170	68	102	360	304	194
	B	O	G		W/FOAM	YES		2,51										
3317W	BE				EMPTY			2,92	10,6	19,6	330	350	170	68	102	360	420	194
	B				W/FOAM	YES		3,3										
3818	BE	OE	GE		EMPTY			3,14	12,4	18,4	380	270	180	47	133	410	340	205
	B	O	G		W/FOAM			3,58										
4412	BE	OE	GE		EMPTY			3,4	10,7	19,2	445	345	125	47	78	474	415	149
	B	O	G		W/FOAM	YES		3,9										
4419	BE	OE	GE		EMPTY			4,2	19,7	29,2	445	345	190	47	143	474	415	214
	B	O	G		W/FOAM	YES		4,7										
4820	BE	OE	GE		EMPTY			4,64	24,7	35,5	480	370	205	50	155	520	435	230
	B	O	G		W/FOAM			5,4										
5117	BE	OE	GE		EMPTY			3,8	15,8	24,7	517	277	173	50	123	546	347	197
	B	O	G		W/FOAM	YES		4,5										
5122	BE	OE	GE		EMPTY			6	21,5	31	517	277	217	50	167	546	347	247
	B	O	G		W/FOAM	YES	YES	7										
5218	BE		GE	DE	EMPTY			3,75	20	26,6	520	285	180	30	150	550	350	200
	B		G	E	W/FOAM	YES	YES	4,3										
5221	BE		GE	DE	EMPTY			3,9	20	30,3	520	285	205	55	150	550	350	225
	B		G	D	W/FOAM	YES	YES	4,5										
5140	BKT01.AH				W/FOAM FILLED DRAWERS			13,8	YES	YES						581	381	455
	BKT02.AH				W/EMPTY DRAWERS			13										
	BKTE.AH				IDRAW - DRAWERS READY			9,75										
	X.B				IBOX - BOXES READY			9,75										
	BE.AH				COMPLETELY EMPTY			7,52										
5325	BE	OE	GE		EMPTY			7	37,2	53	538	405	250	60	190	607	475	275
	B	O	G		W/FOAM	YES		8,25										
5326	BE	OE	GE		EMPTY			10	37,2	53	538	405	250	60	190	627	475	292
	B	O	G		W/FOAM	YES	YES	11,25										
5822	BE	OE	GE		EMPTY			7,16	36,7	56,1	580	440	220	60	160	650	510	245
	B	O	G		W/FOAM			8,39										
5823	BE	OE	GE		EMPTY			9,17	36,7	56,1	580	440	220	60	160	670	510	262
	B	O	G		W/FOAM	YES		10,4										
5833	BE	OE	GE		EMPTY			10,54	62	84,2	580	440	330	60	270	670	510	372
	B	O	G		W/FOAM	YES		12,65										
7630	BE	OE	GE		EMPTY			13,56	81,8	113,1	765	485	305	60	245	860	560	355
	B	O	G		W/FOAM	YES		16,39										
7641	BE	OE	GE		EMPTY			15,02	118,5	153,9	765	485	415	60	355	860	560	460
	B	O	G		W/FOAM	YES		18,87										
7726	BE	OE	GE		EMPTY			10,3	70	118	770	580	265	90	175	836	641	304
	B	O	G		W/FOAM	YES		12,6										
7745	BE	OE	GE		EMPTY			15,5	144	200	770	580	450	90	360	836	641	489
	B	O	G		W/FOAM	YES		19,8										
7814	BE		GE	DE	EMPTY			5,5	25,3	39,6	780	350	145	42	103	846	427	167
	B		G	D	W/FOAM			6,4										
9413	BE		GE	DE	EMPTY			6,7	27,9	45,3	939	352	137	43	94	989	415	157
	B		G	D	W/FOAM	YES		7,7										
11413	BE		GE	DE	EMPTY			7,8	33,3	53,7	1136	350	135	42	93	1189	415	159
	B		G	D	W/FOAM	YES		8,8										
13513	BE		GE	DE	EMPTY			8,7	39,5	63,7	1350	350	135	42	93	1430	415	159
	B		G	D	W/FOAM	YES		9,95										
13527	BE		GE	DE	EMPTY			11,7	97,5	128,5	1350	350	272	42	230	1430	415	296
	B		G	D	W/FOAM	YES		14,9										
15416	BE		GE	DE	EMPTY			11,3	61,6	92,9	1540	377	160	42	118	1629	456	183
	B		G	D	W/FOAM	YES		13,4										
10826	BE				EMPTY			17	120,6	174	1080	620	260	60	200	1178	725	287
	B				W/FOAM	YES		20,4										
10840	BE		GE		EMPTY			19,8	120,6	260	1080	620	400	200	200	1178	718	427
	B		G		W/FOAM	YES	YES	26,3										

* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

** For models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.

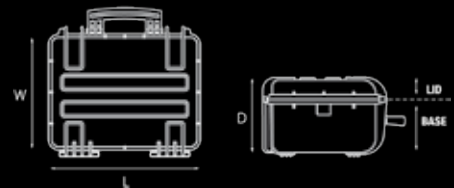

Distributed by:



GT LINE srl
 Via del Lavoro, 9 - Loc. Crespellano
 40053 Valsamoggia (Bo) - Italy
 Tel. +39 051 65041 - Fax +39 051 734925
 www.explorercases.com - sales@explorercases.com



REG. N. 1594-A
 UNI EN ISO 9001:2008

Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described, in accordance with technical or commercial requirements.

CAT. GEN. EXPL. EN REV. 1 - 02/19 - 5.000 EN - MP.0287